EXPGuard Wall Protection
C40A Crash Rail

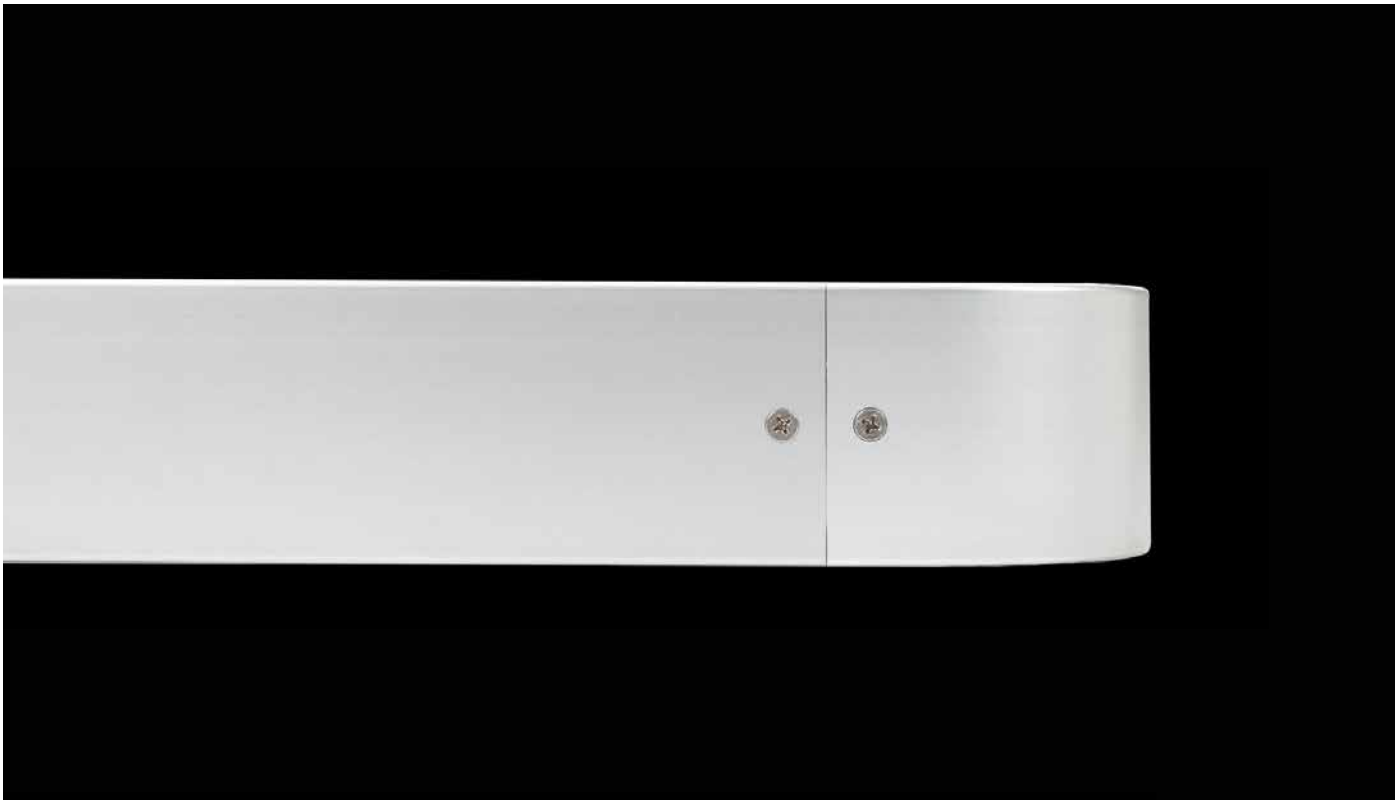

EXPGuard's attractive aluminum C40A Crash Rail offers a sleek choice for medium-to high-impact resistance and optimal design versatility. The C40A is an ideal solution for healthcare environments and areas where sanitary conditions are essential and rugged durability is a must.

The **EXPGuard** C40A Crash Rail is backed by a limited one-year warranty. All Crash Rails are Class A fire rated and meet national building code standards.

For more information on **EXPGuard** Crash Rails, please call your local **EXPGuard** distributor or 272.230.3277.

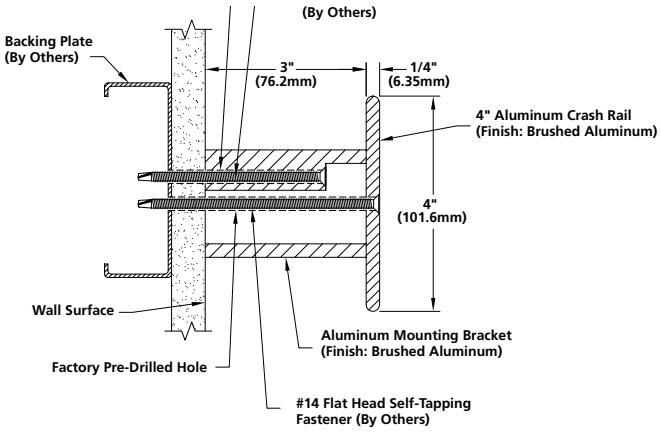

C40A

Product Guide Specification

SECTION 10 26 00 CRASH RAILS

PART 1 GENERAL

1.01 SUMMARY

Section Includes: 4"(101.6mm) Crash Rails.

1.02 REFERENCES

A. American Society for Testing and Materials (ASTM). ASTM B 221-93 Standard Specification for aluminum and aluminum-alloy extruded bars, rods, wire, shapes, and tubes.
B. Aluminum Association (AA).

1.03 SUBMITTALS

A. Comply with Section 01 33 00—Submittals.
B. Product data indicating compliance with specified requirements.
C. Shop drawings showing locations, extent, and installation details.
D. Samples for selection and verification of product pattern and finish.
E. Sample of each product pattern and finish specified.

1.04 QUALITY ASSURANCE

A. Manufacturer: A firm regularly engaged in the manufacturing of wall protection system components similar to those specified.
B. Installer: Engage a skilled installer with no less than three years of documented experience installing similar types of products to the extent and complexity of those required for the project.
C. Code Compliance: Provide product that conforms to the necessary requirements of all applicable codes.
D. Single Source Responsibility: Provide all product system components from a single source.

1.05 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Deliver all products to the job site in the supplier's undamaged packaging clearly labeled and properly identified.
B. Store materials in a clean, dry, protected area where temperature and humidity remain stable and within 40˚F (4˚C) to 100˚F (38˚C).
C. Materials must be stored flat.

1.06 PROJECT CONDITIONS

A. Maintain a constant temperature range of 65˚F (18˚C) to 85˚F, (29˚C) with stable relative humidity, for at least 48 hours prior to, throughout the installation period and maintained consistently thereafter.
B. Installation locations must be enclosed, weatherproofed, and climate controlled prior to commencing installation.

1.07 WARRANTY

Submit supplier's written warranty against defects in material and workmanship.

1.08 MAINTENANCE

Submit supplier's recommended instructions including precautions against cleaning materials and methods that may be detrimental to product finishes and performance.

PART 2 PRODUCTS

2.01 MANUFACTURER

EXPGuard • 2104 Marydale Avenue • Williamsport, PA 17701

2.02 CRASH RAILS

A. "EXPGuard" Model C40A Aluminum Crash Rail mounted over wall clips 32" (812.8mm) O.C.
   1. Height: 4" (101.6mm).
   2. Width: 1/4" (6mm).
   3. Face: Flat-faced.
   4. Material: Aluminum.

PART 3 EXECUTION

3.01 EXAMINATION

A. Examine product, substrates and installation conditions.
B. Notify the Architect in writing of any conditions detrimental to the proper and timely completion of the installation.

3.02 PREPARATION

Surface Preparation: Prior to installation, clean surface to remove dirt, debris and loose particles. Perform additional preparation procedures as required per the manufacturer's instructions.

3.03 INSTALLATION

A. Install the work of this section in strict accordance with manufacturer's written instructions.
B. If problems occur, stop the installation and contact your local EXPGuard representative before proceeding.

3.04 CLEAN UP COMPLETION

Upon completion of the work, remove excess materials, debris and rubbish resulting from the installation and leave the area in a clean and orderly condition.

EXPGuard

Your EXPert Metal Solution Provider

272.230.3277 · EXPGuard.com · Division 10 26 00